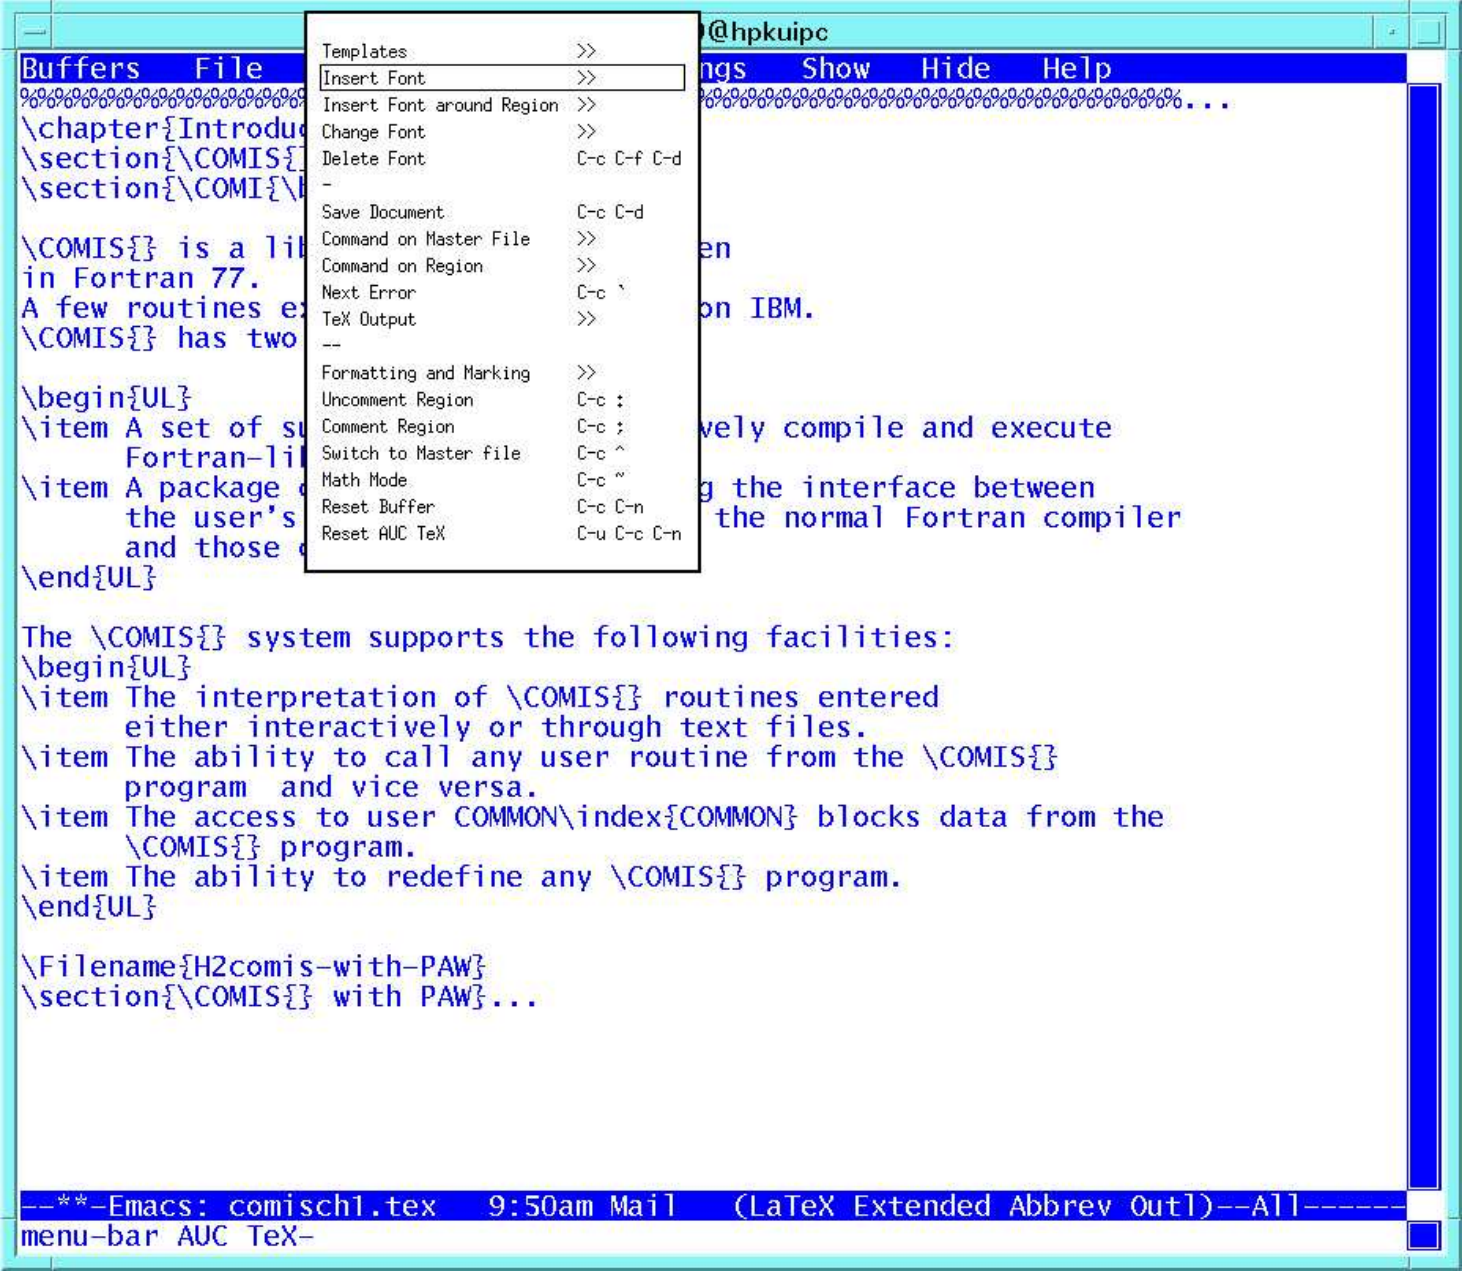
@hpkuipc
Buffers File
ngs Show Hide Help
Templates >>
Insert Font >>
Insert Font around Region >>
Change Font >>
Delete Font C-c C-f C-d
-
Save Document C-c C-d
Command on Master File >>
Command on Region >>
Next Error C-c `
TeX Output >>
--
Formatting and Marking >>
Uncomment Region C-c :
Comment Region C-c ;
Switch to Master file C-c ^
Math Mode C-c ~
Reset Buffer C-c C-n
Reset AUC TeX C-u C-c C-n
\chapter{Introduc
\section{\COMIS{}
\section{\COMI{\
\COMIS{} is a lib
en
in Fortran 77.
A few routines ex
on IBM.
\COMIS{} has two
\begin{UL}
\item A set of su
vely compile and execute
Fortran-lib
\item A package
g the interface between
the user's
the normal Fortran compiler
and those
\end{UL}
The \COMIS{} system supports the following facilities:
\begin{UL}
\item The interpretation of \COMIS{} routines entered
either interactively or through text files.
\item The ability to call any user routine from the \COMIS{}
program and vice versa.
\item The access to user COMMON\index{COMMON} blocks data from the
\COMIS{} program.
\item The ability to redefine any \COMIS{} program.
\end{UL}
\Filename{H2comis-with-PAW}
\section{\COMIS{} with PAW}...
--**-Emacs: comisch1.tex 9:50am Mail (LaTeX Extended Abbrev Outl)--All------
menu-bar AUC TeX-